

Europäisches  
PatentamtEuropean  
Patent OfficeOffice européen  
des brevets

REC'D 17 SEP 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03292367.4

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03292367.4  
Demande no:

Anmeldetag:  
Date of filing: 26.09.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Hewlett-Packard Development Company, L.P.  
20555 S.H. 249  
Houston, TX 77070  
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Methods and apparatus for controlling signalling gateways

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04Q11/04

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## METHODS AND APPARATUS FOR CONTROLLING SIGNALLING GATEWAYS

### BACKGROUND OF THE INVENTION

#### 5 Field of the Invention

The invention relates to methods, and related apparatus, for controlling processing entities used, for instance, in communication systems such as for the control of signalling traffic between a signalling gateway and a plurality of application server processes.

10

#### Background Art

Establishing connections between two telephones involves a complex interaction of digital messages, hereinafter referred to generally as signalling. Nowadays telephone systems perform what is known as "out-of-band" signalling. Out-of-band signalling means that the communications required between the switches and other equipment in the network take place on communication channels other than the channel by which the voice or data flows. Typically, the out-of-band signalling takes place by means of digital communication channels. Thus, the public switch telephone network (PSTN) generally uses two types of channels, media and signalling.

20

Several protocols have been defined for out-of-band signalling. The most commonly used protocol, in North America, Asia and Europe, is known as Signalling System No. 7 (SS7). However, the SS7 protocol defines more than just a protocol for communication between switches. It also defines an entire switching network for facilitating signalling for call establishment, routing, and information exchange functions of switched circuit networks.

25

Since the amount of data transferred over data networks is now much larger than the voice traffic that is carried over the PSTN, carriers are in the process of consolidating both types of networks. In addition, telecommunication networks are increasingly making use of standard computing hardware in order to reduce IT costs.

30

Therefore, there is a trend in the telephone industry to migrate telephone systems using SS7-based networks for signalling to Internet Protocol (IP) networks. The Internet protocols are standardised by the Internet Engineering Task Force (IETF). Moving either or both of the media and signalling channels to an IP infrastructure involves the use of very different technologies

35

and can be done independently. The SIGTRAN IETF working group is currently in the process of defining the protocols for back-hauling SS7 signalling messages across IP networks. Generally speaking, signalling across an IP network involves replacing the lower levels of the SS7 layered protocol communications and transport layers with IP network protocol communications and transport layers.

The SIGTRAN group have taken the initiative to define open standards for transporting SS7 over IP networks. With SIGTRAN technology, telephone services which today lie on top of SS7 networks, can run Application Servers (ASs) lying on top of IP networks. The interworking with SS7 networks is performed by SIGTRAN signalling gateways (SGs).

For additional information regarding SS7 network switching over IP networks, reference may be made to the (IETF) working drafts "Signalling Connecting Control Part User Adaptation Layer (SUA)" available from the IETF website at [www.ietf.org](http://www.ietf.org), and IETF RFC 3332 "SS7 MTP3 - User Adaptation Layer (M3UA)", available from the IETF website, and which are both incorporated herein by reference as if reproduced in full. It is noted that the SUA document is a work in progress and is therefore subject to change. However, these documents, which will be referred to herein as the SIGTRAN documents, exemplify the changes necessary to a standard SS7 signalling system for its implementation in an IP network context. As well as defining the functions of signalling gateways and signalling gateway processes, the SIGTRAN documents referred to above specify in detail the protocols to be implemented between a signalling gateway and a application server.

For more general background information regarding SIGTRAN protocols, reference may be made to the International Engineering Consortium, in document "SS7 Over IP Signalling Transport and SCTP," which is available from the IEC website [www.iec.org](http://www.iec.org), and which is incorporated herein by reference as if reproduced in full.

To enhance the availability of the signalling gateway, it can be distributed over several processes running in one or several computers, each of them being a Signalling Gateway Process (SGP). Every SGP belonging to a particular SG has the same SS7 point code (or the same list of PCs), with each SGP generally being connected to the SS7 network through redundant links that are selected in conventional manner via Signalling Link Selector (SLS) values present in the SS7 messages.

On the IP network side, each SGP is connected to the ASPs running the services. Each AS, which can typically be identified with a single logical service, such as a Short Message Service Centre (SMSC), can also be implemented in a distributed manner by one or more processes or computers - referred to as the ASPs. To provide improved reliability, each SGP is typically  
5 directly connected to each ASP through an Stream Control Transfer Protocol (SCTP) association such that there is one association between each SGP and each ASP.

However, the use of redundant links to the SS7 network, which is highly desirable to ensure fault tolerance of the gateway, can result in latency and performance inefficiencies within the  
10 gateway since signalling messages may need to be transmitted between elements of the gateway itself in order to reach signalling unit hardware which carries an outbound SS7 link selected in accordance with an SLS value of a message.

It is an object of the present invention to overcome this and/or other drawbacks with the prior  
15 art.

#### SUMMARY OF THE INVENTION

In brief, the present invention provides a method for operating a signalling gateway comprising  
20 determining information enabling an application server to identify a signalling gateway process to which to direct a message destined for a particular point code and making said information available to the application server.

In preferred embodiments, the information takes the form of a routing table that serves to  
25 distribute signalling gateway process identifiers over possible SLS values by, for instance, mapping process instance identifiers to possible signal link selector values for messages sent by the application server.

Thus, an application server can obtain more specific information enabling it to determine  
30 directly a signalling gateway process to which to transmit messages destined for a particular point code. With use of a distributed gateway architecture where signalling links are distributed over redundant hardware, the SGPs can be hosted so as to each have direct access to signalling unit hardware for a subset of the signalling links. By allowing the application server processes the possibility to determine to which SGP each message should be directed, retransmission of  
35 messages within the signalling gateway can be avoided.

In preferred embodiments, the signalling gateway can be responsive to a change in the status of links upon a route to a particular point code to recalculate the routing table for that point code and transmit the recalculated routing table to an application server in a further message. In this way, it can be provided that the ASPs select SGPs on the basis of the SLS values taking into account the availability or not of the signalling links to which each SGP has direct access.

In an SS7 network, the routing decisions are taken by the signalling network management functions of the MTP3 layer. Whenever a change in the status of a signalling link, route or point code occurs, 3 different signalling network management functions (ie signalling traffic management, link management and route management) are activated. However, only a subset of the routing information gathered by the MTP3 layer is transmitted to the remote AS SIGTRAN layer (M3UA or SUA as the case may be). In the systems envisaged by the SIGTRAN documents, only the status of the remote Point Code ("available", "restricted" from SG point of view, or "not available") is reported to the remote AS. The Signalling Gateway maintains the status (availability, restriction, and/or congestion of route to destination) of the individual routes, derives the overall availability or congestion status of the destination from the status of the individual routes, and informs the ASP of this derived status whenever it changes. In at least preferred embodiments, the routing table is included in this message transmitted from an SGP to an ASP that serves to indicate the accessibility of the point code concerned. In accordance with the SIGTRAN documents, a separate routing table being established for each destination point code.

Other aspects of the invention provide methods for operating a corresponding application server process, signalling gateway elements and application server elements arranged to carry out the above described methods and a signalling gateway having a redundant set of signalling links to a signalling network and having a single point code, or set of point codes, therein, and comprising a plurality of such signalling elements, with each signalling element comprising a signalling unit to which a subset of the signalling links are connected.

### BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows the general configuration of a signalling gateway;

Figures 2a and 2b illustrate the layered protocol communications schemes of a Signalling End Point, a Signalling Gateway Process and an Application Server Process;

Figure 3 illustrates associations between Signalling Gateway processes and Application Server processes and signalling connections to point codes;

5 Figure 4 shows an exemplary sequence of events and signalling network management message exchanges;

Figure 5 illustrates the main processes that carried out by signalling gateway processes in order to implement this invention;

Figure 6 illustrates steps of a process carried out by an application server process in order to  
10 send a message.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows the general configuration of a signalling gateway 100 interconnecting an SS7  
15 network 110 and a series of Application Servers (ASs) 130 via an IP Network 120. Figure 2a and 2b illustrate the layered protocol communications architecture of the various components.

SS7 Signal Transfer Point (STP) or Signal End Point (SEP) 200 includes the MTP1, MTP2, MTP3, SCCP and SCCP user part layers. As is known in the prior art, a Signal Transfer Point (STP) or Signal End Point (SEP) 200 routes SS7 signalling within the SS7 network and manages various signalling links which comprise the SS7 network. Routing is accomplished by processing of the routing label of an SS7 message by the Message Transfer Part (MTP) functionality. The MTP layers comprise three levels. Levels 1 and 2 are used for the transfer of SS7 messages from one point to another over an individual signalling link. Level 3 is used for  
25 the transfer of SS7 messages over the SS7 network beyond the requirements of individual link transmission. The MTP3 layer is mainly dedicated to ensuring the delivery of incoming and outgoing messages (such as discrimination, distribution and routing), and the network reconfiguration (such as traffic management, route management and link management).

30 Communication between Signalling Gateway Processes (SGPs) of the SG 100 and Application Server Processes (ASPs) within the ASs 130 is carried out using a transport layer defined by the SIGTRAN working group and referred to as SCTP (Stream Control Transfer Protocol) which is defined in RFC 3309. Signalling Gateway 100 terminates the MTP1, MTP2, MTP3 and SCCP layers and includes a Nodal Interworking function (NIF) as well as SUA, SCTP and IP layers.  
35 Each AS 130 includes IP, SCTP, SUA and SCCP user layers. Signalling Gateway 100 thus terminates the SS7 lower layers and encapsulates their payload data into SCTP messages to

send them to an Application Server 130. The AS terminates the SCTP layers, processes the signalling messages and replies to the SG 100 in the same way. In the case of SS7 and M3UA interworking, the M3UA adaptation layer is designed to provide an extension of the MTP3 layer as shown in Fig 2b.

5

These architectures are well known to those skilled in the relevant art and are described in the SIGTRAN documents, referred to above.

10

Figure 3 illustrates the interconnection of a plurality of SGPs, such as SGP1 and SGP2 to a plurality of ASPs, such as ASP1, ASP2 and ASP3 via a plurality of SCTP associations 300. The architecture is such that each SGP is hosted in a machine that contains the signalling units that provide only a subset of the MTP2 signalling links to SS7 network 110 available on the SG.

15

On the SS7 network, the routing decisions are taken by the signalling network management functions of the MTP3 layer. Whenever a change in the status of a signalling link, route or points occurs, 3 different signalling network management functions (ie signalling traffic management, link management and route management) are activated. The protocols defined in the SIGTRAN documents provide for a subset of the routing information gathered by the MTP3 layer to be transmitted to the remote AS SIGTRAN layer (M3UA or SUA as the case may be). Basically, only the status of the remote Point Code ("available", "restricted" from SG point of view, or "not available") is reported to the remote AS by means of DUNA (destination unavailable), DRST (destination restricted), DAVA (destination available) SIGTRAN messages respectively.

25

The DUNA message is sent from an SGP in an SG to all concerned ASPs to indicate that the SG has determined that one or more SS7 destinations are unreachable. It is also sent by an SGP in response to a message from the ASP to an unreachable SS7 destination. As an implementation option the SG may suppress the sending of subsequent "response" DUNA messages regarding a certain unreachable SS7 destination for a certain period to give the remote side time to react. If there is no alternate route via another SG, the MTP3-User at the ASP is expected to stop traffic to the affected destination via the SG as per the defined MTP3-User procedures.

35

The DUNA message contains the following parameters:

Network Appearance      Optional



Routing Context      Optional  
Affected Point Code    Mandatory  
INFO String            Optional

- 5    The optional INFO String parameter is defined so as to be able to carry any meaningful UTF-8 character string along with the message. The length of the INFO String parameter is from 0 to 255 octets. No procedures are specifically identified in the SIGTRAN documents for its use but it is suggested that the INFO String may be used for debugging purposes. The DRST, DAVA and DAUD messages have similar formats.

10

- In the case of a distributed Signalling Gateway in which each SGP is hosted in a machine that contains the signalling units that provide only a subset of the MTP2 signalling links to SS7 network 110 available on the SG, the information available on the AS side, and provided by the SIGTRAN (M3UA or SUA) layer in accordance with the protocols described in the SIGTRAN documents is therefore not sufficient to allow an ASP to identify the SGP that contains the SS7 signalling link that corresponds to a particular SLS value for a given destination point code. Thus if the ASP sends a message to an SGP that does not contain the right signalling link, the selected SGP must in a separate step forward the message within the SG to the SGP that does contain the signalling link.

20

- A protocol will be described below which is based on messages embedded in the SIGTRAN messages by means of the usage of "info string" field. By taking advantage of this extra information, the ASPs are able to determine the SGP that contains the signalling link, on which the message must be forwarded, directly.

25

- The protocol, which will be referred to as RSIG in this document, is implemented by 4 messages:

#### 30    ROUTING\_INFO\_CAPABILITY\_REQ

30

- This message is sent from the ASP to the SGP embedded in an ASP-ACTIVE SIGTRAN message to determine whether the remote SGP supports the RSIG protocol, to gather the RSIG identifier of the remote SGP and to indicate that this ASP may request RSIG information from the SGP. The ASP sends this message to each SGP in the SG in order to collect all the RSIG IDs.

35

**ROUTING\_INFO\_CAPABILITY\_ACK**

- This message is sent from the SGP to the ASP, in an ASP-ACTIVE-ACK SIGTRAN message in response to a received ROUTING\_INFO\_REQ message, to indicate that the SGP supports the RSIG protocol and that the SGP authorizes the ASP to gather RSIG information and to report the SGP's RSIG identifier.

**ROUTING\_TABLE**

- This message is sent by an SGP to the ASP, in a DAVA SIGTRAN message to indicate the routing (for each SLS) for a particular destination.

**ROUTING\_INFO\_REQ**

- This message is sent by an ASP to the SGP, in a DAUD SIGTRAN message to indicate that as part of the audit of the specified destination, the routing table is requested. The DAUD message is defined in the SIGTRAN protocols to be sent from the ASP to the SGP to audit the availability or congestion state of SS7 routes from the SG to one or more affected destinations. The format and description of DAUD Message parameters is the same as for the DUNA message described above. This message has an immediate effect in the sense that the routing table corresponding to the audited PC is made immediately available by the SGP (by means of a DAVA containing a RSIG ROUTING\_TABLE message) but it also indicates, in the SGP, that each time an event occurs that affects the routing of the PC concerned, the SG must inform the ASP. By this means, the information sent by the SGPs to the ASPs is limited to the set of remote PC's that each ASP needs to handle.

As "info string" field must be contain only ASCII characters, the messages of the RSIG protocol are based on ASCII only and are described by the following ABNF grammar (see RFC2234) description:

- ```

30  RSIGMessage = RSIGToken SLASH Version SEP messageBody
    messageBody = 1*1( RoutingInfoCapabilityReq /
                        RoutingInfoCapabilityAck /
                        RoutingTable /
35  RoutingInfoReq )

```

```

RoutingInfoCapabilityReq = RoutingInfoCapabilityReqToken EQUAL LBRKT
RBRKT
RoutingInfoCapabilityAck = RoutingInfoCapabilityAckToken EQUAL LBRKT
RICAParameters RBRKT
5 RoutingTable = RoutingTableToken EQUAL LBRKT SLSTable RBRKT
RoutingInfoReq = RoutingInfoReqToken EQUAL LBRKT RIRParameters RBRKT

RICAParameters = RICASGPid COMMA RICAResult
10 RICASGPid      = RICASGPidToken EQUAL 1*3 (DIGIT)
RICAResult      = ResultToken EQUAL RICAResultValue
RIRParameters   = RIRInfo
RIRInfo         = RIRInfoToken EQUAL RIRInfoEnableToken
SLSTable = (SLSITUTable / SLSANSITable)
15 SLSITUTable = SLSITUTableToken EQUAL LBRKT SLSITUTableResult RBRKT
SLSANSITable = SLSANSITableToken EQUAL LBRKT SLSANSITableResult RBRKT

RICAResultValue = 1*2 (DIGIT) ; today 2 values are defined:
20           ; => 1 : OK, the capability is supported
           ; => 2 : KO, the capability is not supported

SLSITUTableResult = 16*16 (1*3 (DIGIT) COMMA) 1*3 (DIGIT)
SLSANSITableResult = 32*32 (1*3 (DIGIT) COMMA) 1*3 (DIGIT)
25 Version = 1*2 (DIGIT) ; today, only version 1 is defined

DIGIT          = %x30-39          ; 0-9
SLASH          = %x2F              ; "/"
30 SP          = %x20              ; space
HTAB           = %x09              ; horizontal tab
CR             = %x0D              ; Carriage return
LF             = %x0A              ; linefeed
EOL            = (CR [LF] / LF )
35 WSP         = SP / HTAB ; white space
SEP           = ( WSP / EOL )
LWSP          = *( WSP / EOL )
LBRKT         = LWSP %x7B LWSP ; "{"

```

RBRKT = LWSP %x7D LWSP ; "}"  
 COMMA = LWSP %x2C LWSP ; ","  
 EQUAL = LWSP %x3D LWSP ; "="

5 RSIGToken = ("RSIG")  
 RICASGPIDToken = (''RICASGPID'' / ''RICASI'')  
 RIRInfoToken = (''RIRI'')  
 RIRInfoEnableToken = (''OFF'' / ''ON'')  
 RoutingInfoCapabilityReqToken = (''RICR'')  
 10 RoutingInfoCapabilityAckToken = (''RICA'')  
 RoutingTableToken = (''RT'')  
 RoutingInfoReqToken = (''RIR'')  
 ResultToken = (''RES'' / ''R'')  
 SLSITUTableToken = (''SLSITUTAB'' / ''SIT'')  
 15 SLSANSITableToken = (''SLSANSITAB'' / ''SAT'')

It will be appreciated that a decoder of such a grammar can be readily implemented with commonly available tools.

20

In the following, an example will be given of behaviour for the system illustrated in Fig 3 with an ASP and a SG 100 composed of 2 SGPs, SGP1 and SGP2. SGP1 and SGP2 are shown as being hosted on physically separate hardware platforms interconnected by an internal local area network. Each component is assumed to be configured to make use of the RSIG protocol.

25

The exemplary SS7 topology shown in Fig 3 is as follows: SGP1 contains 2 signalling links: link 11 and Link 21; SGP2 contains 2 signalling links: link 12 and link 22. SG 100 is connected to PC 10 by linkset 1 and to PC 11 by linkset 2. A linkset is a number of signalling links that directly interconnect two signalling points and which are used as a module— links within the linkset being selected by means of a the SLS values in each message. It will be understood that the separate signalling links within the linksets are generally always distributed over different SGPs for redundancy reasons.

30

The SG 100 is connected in associated mode to 2 adjacent nodes: PC 10 and PC 11. In this example, two other remote point codes, are also available on the network: PC 20 and PC 21. Each of them is reachable via 2 routes. The network is assumed for the purposes of example to be an ITU network.

35

An exemplary sequence of events and signalling network management message exchanges is shown in Fig 4 and the main processes used in signalling gateway 100 are illustrated in Fig 5.

- 5 Initially the ASP signals in conventional manner to the SGP1 and SGP2 that it is up using respective ASP\_UP messages which are acknowledged by ASP\_UP\_ACK messages as shown in Fig 4.

- 10 The use of the RSIG protocol to pass routing information between ASP 130 and SGP1 and SGP2 will now be described in relation to steps 500 to 590 as follows.

Step 500: When the ASP is able to handle traffic it informs SGP1 by sending an ASP\_ACTIVE message in which a ROUTING\_INFO\_CAPABILITY\_REQ message is embedded. The ROUTING\_INFO\_CAPABILITY\_REQ message is formatted as follows:

15 RSIG/1  
RICR = { }

- 20 where RSIG is the ABNF string used to identify the RSIG protocol, 1 is the version of RSIG, RICR is the ABNF string used to identify a ROUTING\_INFO\_CAPABILITY\_REQ RSIG message.

- Step 510: SGP1 replies to ASP 100 using an ASP\_ACTIVE\_ACK message in which is embedded an ROUTING\_INFO\_CAPABILITY\_ACK message. SGP1 has the RSIG capability, and thus it authorizes the ASP to take advantage of this capability and it informs the ASP that its RSIG identifier is 111. The ROUTING\_INFO\_CAPABILITY\_ACK message is formatted as follow:

25 RSIG/1  
RICA = {  
    RICASI = 111,  
30     R = 1  
   }

- 35 where RSIG is the ABNF string used to identify the RSIG protocol, 1 is the version of RSIG, RICA is the ABNF string used to identify a ROUTING\_INFO\_CAPABILITY\_ACK RSIG message, RICASI indicates an SGP Identifier (value: 111), R indicates the result (value: 1, meaning that it is OK).

The SGP identifiers are allocated and managed by one of the SGPs which is designated a "master" SGP in any suitable way.

- 5 This registration process is illustrated by functionality 600 in Fig 5 which is present in each SGP. In the example of Fig 4, the registration process is then repeated for SGP2, as follows.

Step 520: ASP 100 informs SGP2 of its ability to handle traffic using a ASP\_ACTIVE message in which is embedded an ROUTING\_INFO\_CAPABILITY\_REQ message to check that SGP2  
10 has the RSIG capability.

This second ROUTING\_INFO\_CAPABILITY\_REQ message is formatted as follow:

RSIG/1

RICR = {}

- 15 Step 530: SGP2 replies to ASP 100 using a ASP\_ACTIVE\_ACK message in which is embedded an ROUTING\_INFO\_CAPABILITY\_ACK message. It has the RSIG capability; it authorizes the ASP to take advantage of this capability and it informs the ASP that its RSIG identifier is 222.

The ROUTING\_INFO\_CAPABILITY\_ACK message from SGP2 is formatted as follow:

20 RSIG/1

RICA = {

RICASI = 222,

R = 1

}

25

Next a destination query process, illustrated by functionality 620 in Fig 5 is carried out in relation to a particular destination point code selected by ASP 130. Within SG 100 each SGP maintains a routing table for each SS7 destination linking SLS values, SGP IDs and signalling link identifiers. These routing tables are updated internally to SG 100 based on information  
30 received from the SS7 network. In one embodiment for instance, whenever a TFP/TFA or TFR message is received from the SS7 network or a local signalling link changes status, each SGP forwards this information to the designated "master" SGP which can serialise the recalculation of the routing tables and their broadcast to each SGP.

- 35 Step 540: ASP 130 wants to AUDIT the SS7 remote destination 20. It sends an SIGTRAN DAUD message for this Point Code and informs SGP1 that it wants to be notified of routing

13

changes by including a ROUTING\_INFO\_REQ message in the DAUD message. This information is distributed internally by the SG to all SGPs.

The ROUTING\_INFO\_REQ message is formatted as follow:

```
RSIG/1
5  RIR = {
    RIRI = ON
  }
```

where RSIG is the ABNF string used to identify the RSIG protocol, 1 is the version of RSIG, RIR is the ABNF string used to identify a ROUTING\_INFO\_REQ RSIG message, RIRI indicates if the ASP wants to enable or disable the RSIG feature for this destination (value ON: feature is enabled).

Step 550: Immediately, SGP1 retrieves the routing table for the destination and reports the status of the SS7 remote destination 20 (as specified in the SIGTRAN procedure) and includes the routing information in the DAVA message using a first embedded ROUTING\_TABLE RSIG message.

The first ROUTING\_TABLE message in this example is formatted as follows (for the ITU case where the SLS has 4 bits):

```
RSIG/1
20  RT = {
    SIT = {
        111,
25      222,
        111,
        222,
        111,
        222,
30      111,
        222,
        111,
        222,
        111,
35      222,
        111,
        222,
```

```

        111,
        222
    }
}

```

5

where RSIG is the ABNF string used to identify the RSIG protocol, 1 is the version of RSIG, RT is the ABNF string used to identify a ROUTING\_TABLE RSIG message, SIT indicates an ITU Routing Table.

- 10 This first ROUTING\_TABLE message indicates to ASP 130 that, to reach the remote destination 20, it is optimal for the ASP to take the decisions shown in Table 1 according to the SLS value of the MSU.

| <i>SLS value</i> | <i>SGP</i>          |
|------------------|---------------------|
| 0                | SGP1 (RSIG Id: 111) |
| 1                | SGP2 (RSIG Id: 222) |
| 2                | SGP1 (RSIG Id: 111) |
| 3                | SGP2 (RSIG Id: 222) |
| 4                | SGP1 (RSIG Id: 111) |
| 5                | SGP2 (RSIG Id: 222) |
| 6                | SGP1 (RSIG Id: 111) |
| 7                | SGP2 (RSIG Id: 222) |
| 8                | SGP1 (RSIG Id: 111) |
| 9                | SGP2 (RSIG Id: 222) |
| 10               | SGP1 (RSIG Id: 111) |
| 11               | SGP2 (RSIG Id: 222) |
| 12               | SGP1 (RSIG Id: 111) |
| 13               | SGP2 (RSIG Id: 222) |
| 14               | SGP1 (RSIG Id: 111) |
| 15               | SGP2 (RSIG Id: 222) |

- 15 Table I

In the following steps, various routing change scenarios will be described and, in each case, a routing change process 620 is carried out. Process 620 basically comprises 3 steps— detection of the routing change, recalculation of the routing tables and communication of the updated



routing tables to ASP 130 embedded in DAVA messages. As before in some embodiments each SGP may forward routing change information to the designated "master" SGP which recalculates the routing tables and broadcasts them to each SGP. Alternatively, the routing tables could be recalculated within the SGP that first detects the routing change event and  
5 broadcasted by that SGP to all the other SGPs. The DAVA messages including the updated routing tables may be sent out to ASP 130 by any of the SGPs and so any suitable and/or convenient mechanism for selecting an SGP to respond may be used, such as having the master SGP respond (if there is one), having the SGP that detects the routing change respond, or having the SGP that originally received the ROUTING\_INFO\_REQ message from the SGP. Of  
10 course, in some embodiments all necessary routing tables may be calculated, configured or otherwise determined in advance and stored for a set of potential routing changes.

Step 560: In this example, it is imagined that SGP1 detects for instance that signalling link 11 is no longer operational for whatever reason, and implements a routing change. ASP 130 has  
15 requested to be notified for routing changes to destination 20 only, so SGP1 informs ASP with a DAVA message containing a recalculated second ROUTING\_TABLE RSIG message, formatted as follows:

```
SIG/1
RT = {
20   SIT = {
           222,
           222,
           222,
           222,
25   222,
           222,
           222,
           222,
           222,
30   222,
           222,
           222,
           222,
           222,
35   222,
           222
       }
}
```

}

This second routing table indicates to ASP 130 that for all values of the SLS field in the MSU it is optimal for the ASP to send the MSU to SGP2 (RSIG ID 222).

5

Step 570: Now for the purposes of example, imagine that SGP2 receives, on the SS7 network side, a transfer prohibited (TFP) signal indicating that the first route (linkset 1) is unavailable for destination 20. The receipt of this message results in recalculated routing tables being broadcast to all SGPs and SGP1 informs ASP 130 with a DAVA message containing a third

10 ROUTING\_TABLE RSIG message, formatted as follows:

RSIG/1

RT = {

SIT = {

|    |      |
|----|------|
|    | 111, |
| 15 | 222, |
|    | 111, |
|    | 222, |
|    | 111, |
|    | 222, |
| 20 | 111, |
|    | 222, |
|    | 111, |
|    | 222, |
|    | 111, |
| 25 | 222, |
|    | 111, |
|    | 222, |
|    | 111, |
|    | 222, |
| 30 | }    |
|    | }    |

This third ROUTING\_TABLE message indicates to ASP 130 that, to reach the remote destination 20, it is once again optimal for the ASP to take the decisions shown in Table 1 according to the SLS value of the MSU.

35

Step 580: Now for the purposes of example, imagine that SGP1 receives, on the SS7 network side, a transfer prohibited (TFP) signal indicating that the second route (linkset 2) is unavailable for destination 20. Consequently, destination 20 is now not accessible. So SGP1 informs ASP with a DUNA message which does not contain any RSIG information since no routing table is necessary - the destination being not accessible.

Step 590: SGP1 receives, on the SS7 network side, a transfer allowed (TFA) signal indicating that the second route (linkset 2) is now available for destination 20. So SGP1 informs ASP with a DAVA message containing a fourth ROUTING\_TABLE RSIG message, formatted as follows:

```

RSIG/1
RT = {
    SIT = {
        111,
        222,
        111,
        222,
        111,
        222,
        111,
        222,
        111,
        222,
        111,
        222,
        111,
        222,
        111,
        222
    }
}

```

This fourth ROUTING\_TABLE message indicates to ASP 130 that, to reach the remote destination 20, it is once again optimal for the ASP to take the decisions shown in Table 1 according to the SLS value of the MSU.

Figure 6 illustrates the process carried out by application server process 130 in order to send a signalling message. First the SLS value is extracted from the message in step 630, then the routing table is accessed in step 640 and a SGP identifier is determined based on the SLS value and the values of the routing table. The message is then sent on the SCTP association  
5 corresponding to the SGP identifier in step 650.

It will be appreciated that the present embodiments take the form of a set of computer programs intended for use with general purpose computing and signalling platforms and which may be marketed in the form of suitable computer program products including the functionality  
10 described. It will be appreciated that the invention may equally be implemented as special purpose hardware or any combination of software and hardware.

Although a specific embodiment of the invention has been described, the invention is not to be limited to the specific arrangement so described. The invention is limited only by the claims.

**CLAIMS**

1. A method for operating a signalling gateway process comprising determining routing  
5 information enabling an application server process to identify a signalling gateway process to  
which to direct signalling messages destined for a particular point code and making said  
information available to the application server process.
2. A method as claimed in claim 1 wherein the information takes the form of a routing  
10 table that serves to distribute signalling gateway process identifiers over possible signalling link  
selector values included in signalling messages sent by the application server process.
3. A method as claimed in any preceding claim comprising responding to a change in the  
status of links upon a route to a particular point code by redetermining the routing information  
15 for that point code and making the redetermined information available to an application server  
process.
4. A method as claimed in any preceding claim wherein the determined and/or  
redetermined routing information is made available to the application server process in response  
20 to receipt of an audit message from the application server process for a particular destination  
point code.
5. A method as claimed in any preceding claim wherein the determined and/or  
redetermined routing information is included in a message transmitted from a signalling  
25 gateway process to an application server process that serves to indicate the availability of the  
point code concerned.
6. A method as claimed in any preceding claim including a registration step comprising  
transmitting a signalling gateway process identifier to an application server process.  
30
7. A method as claimed in claim 6 wherein the signalling gateway process identifier is  
included in an acknowledgement by the signalling gateway process of a message indicating that  
the application server process is ready to receive signalling traffic.
- 35 8. A method for operating an application server process to sending signalling messages to  
a signalling network via signalling gateway comprising a plurality of signalling gateway

processes, the method comprising identifying a signalling gateway process to which to direct signalling messages destined for a particular point code by reference to routing information received from a signalling gateway process and SLS values contained in the signalling messages.

5

9. A method as claimed in claim 8 wherein the routing information takes the form of a routing table that serves to distribute signalling gateway process identifiers over possible signalling link selector values included in the signalling messages.

10

10. A method as claimed in claim 8 or claim 9 comprising repeatedly receiving the routing information from a signalling gateway process in messages that serve to indicate the availability of the point code concerned.

15

11. A method as claimed in any of claims 8 to 10 comprising initiating the repeated sending of the routing information by including a request in an audit message for a particular destination point code sent to a signalling gateway process.

20

12. A method as claimed in any of claims 8 to 11 including a registration step requesting and receiving a signalling gateway process identifier from a signalling gateway process.

25

13. A method as claimed in claim 12 wherein the registration request is included in a message indicating that the application server process is ready to receive signalling traffic.

30

14. A signalling gateway element arranged to carry out a method as claimed in any of claims 1 to 7.

15. A signalling gateway having a redundant set of signalling links to a signalling network and having a single point code, or set of point codes, therein, and comprising a plurality of signalling elements as claimed in claim 14, with each signalling element comprising a signalling unit to which a subset of the signalling links are connected.

35

16. An application server element arranged to carry out a method as claimed in any of claims 8 to 13.

17. A signalling system comprising a signalling gateway as claimed in claim 15 within a signalling network and having a single point code, or set of point codes, therein, the signalling

gateway elements of the signalling gateway each having at least one connection with at least one application server element as claimed in claim 15.

ABSTRACTMETHODS AND APPARATUS FOR CONTROLLING SIGNALLING GATEWAYS

5

A method is described for operating a signalling gateway comprising determining information enabling an application server to identify a signalling gateway process to which to direct a message destined for a particular point code and making said information available to the application server. In preferred embodiments, the information takes the form of a routing table that serves to distribute signalling gateway process identifiers over possible SLS values by, for instance, mapping process instance identifiers to possible SLS values for messages sent by the application server. By allowing the application server processes the possibility to determine to which signalling gateway process each message should be directed, retransmission of messages within the signalling gateway can be avoided.

15

Fig 4.



1/5

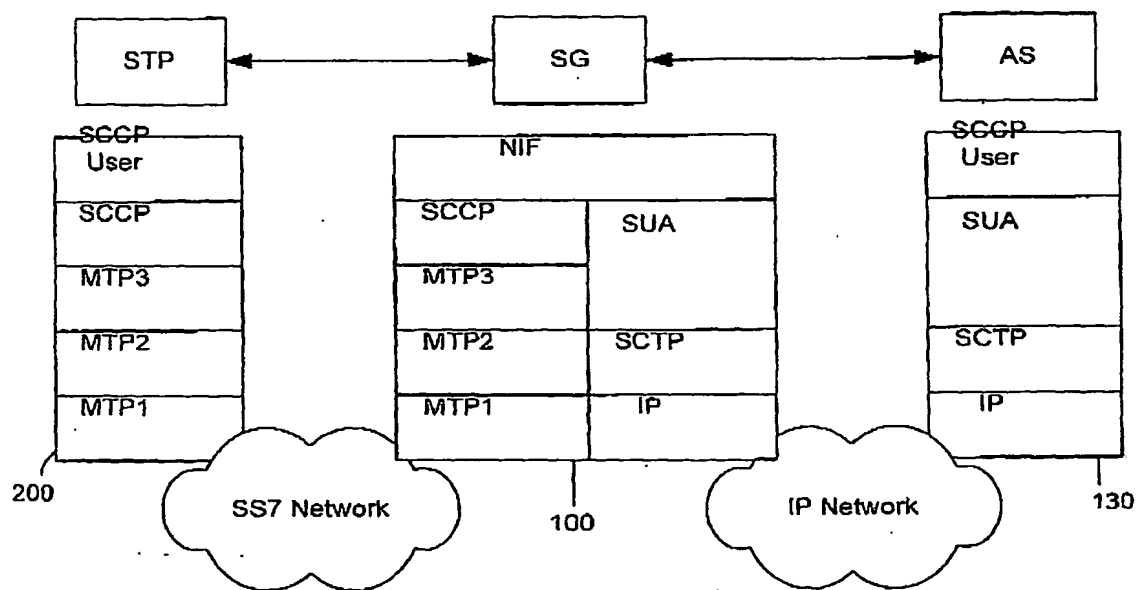
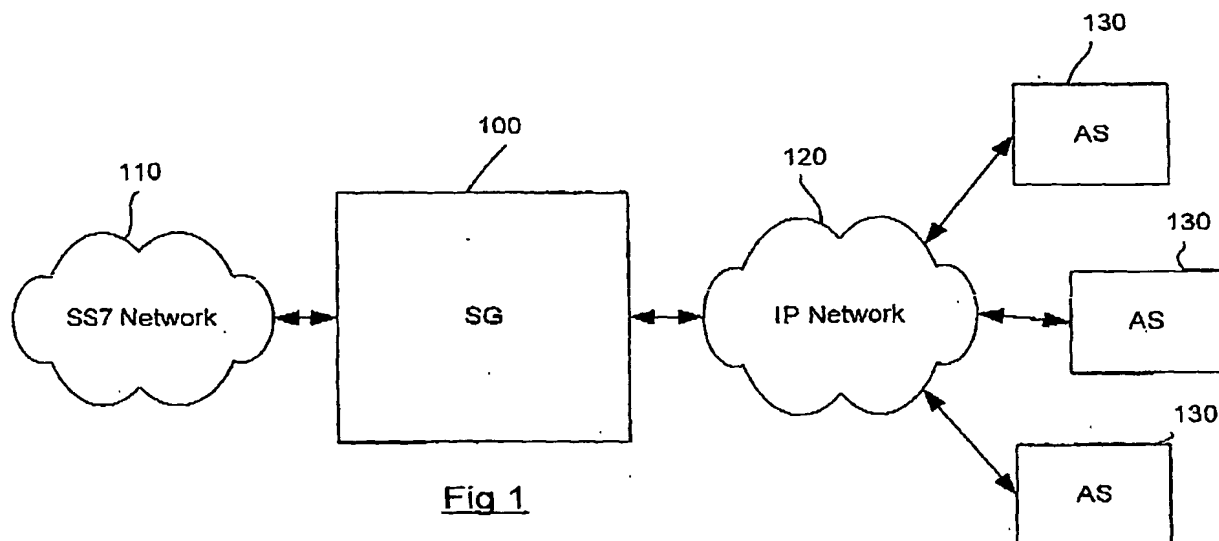
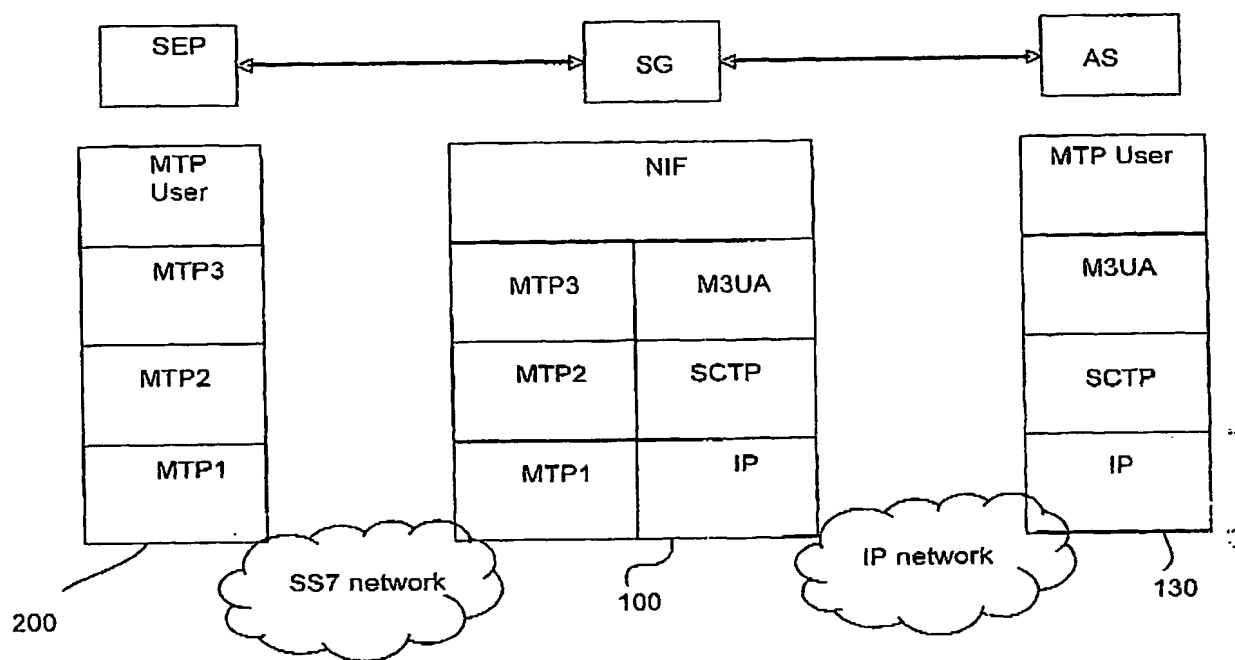


Fig 2a

2/5

Fig 2b

3/5

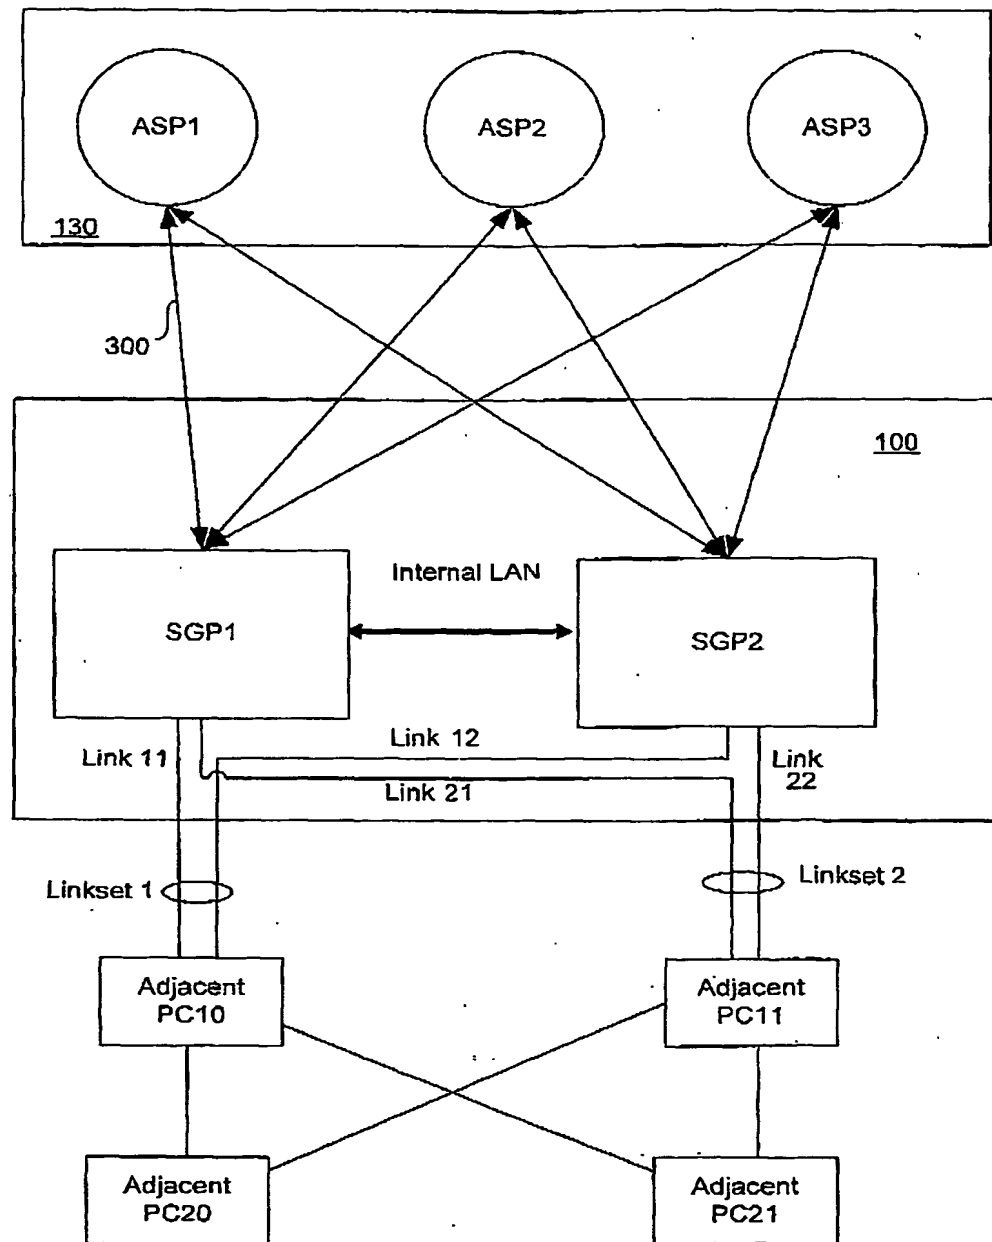


Fig 3

4/5

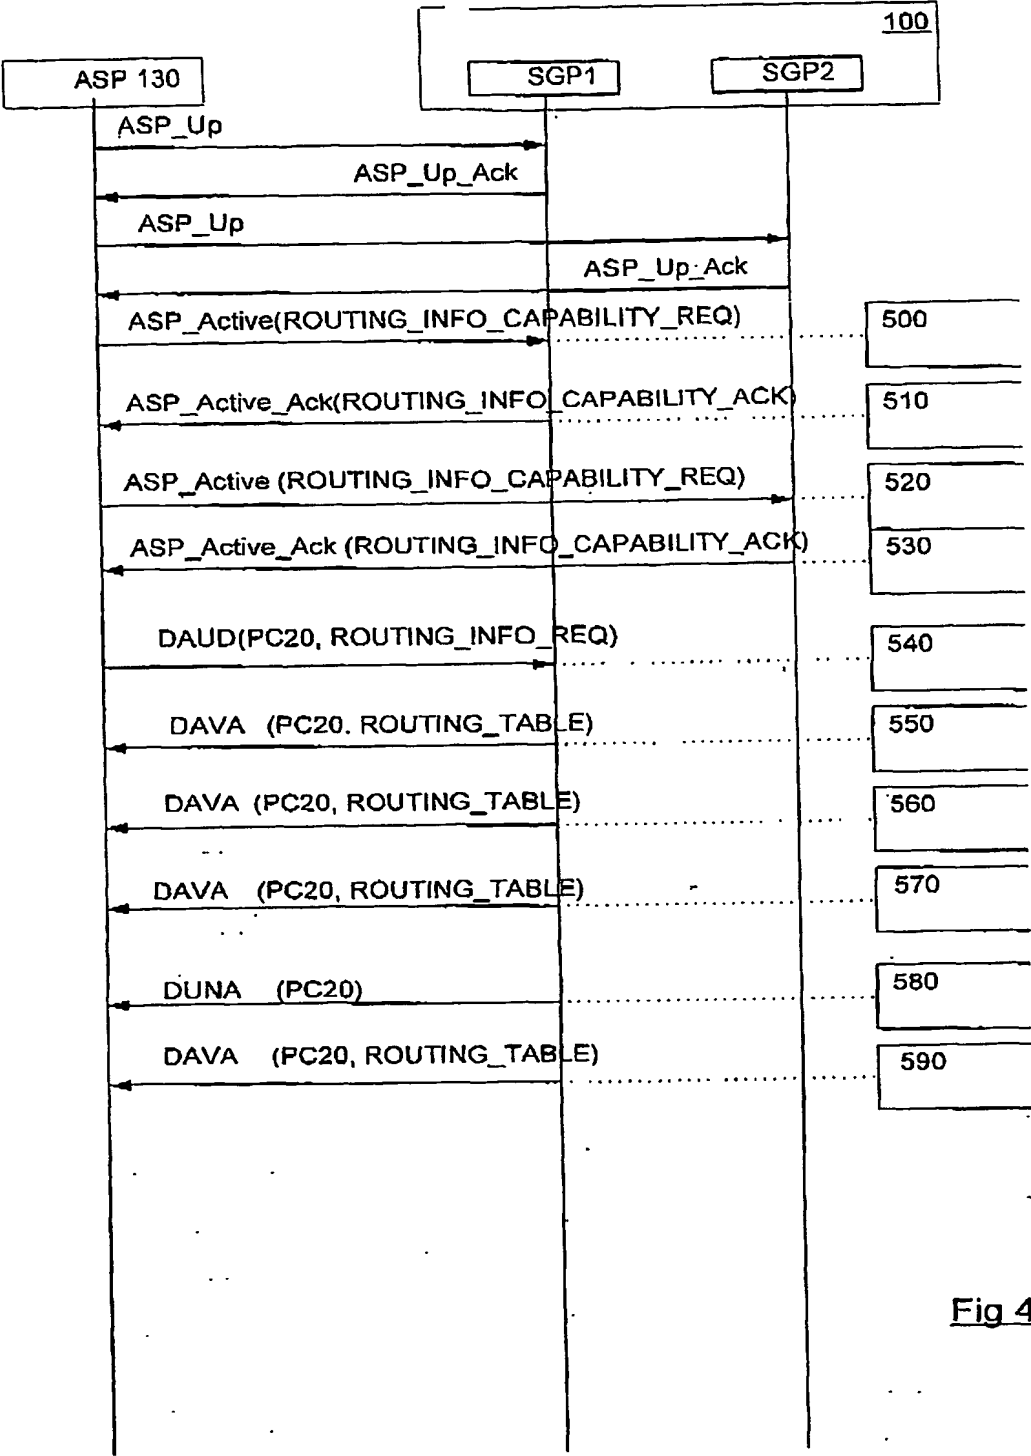
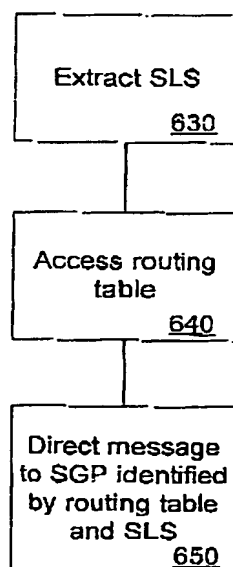
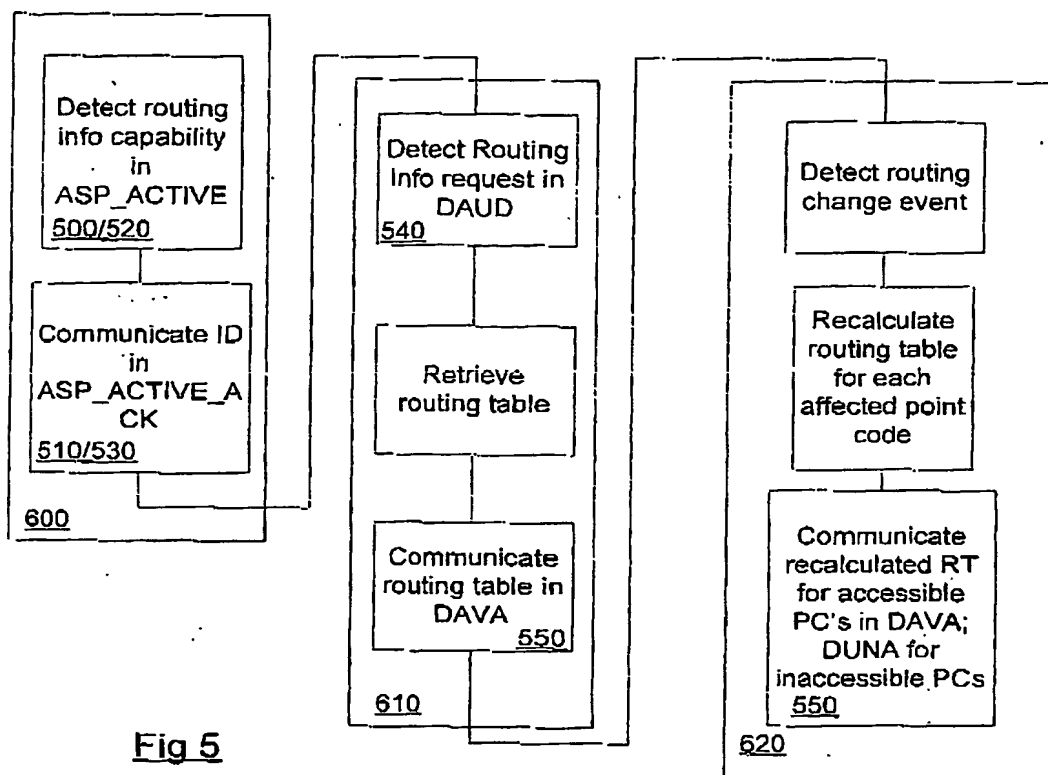


Fig 4

5/5



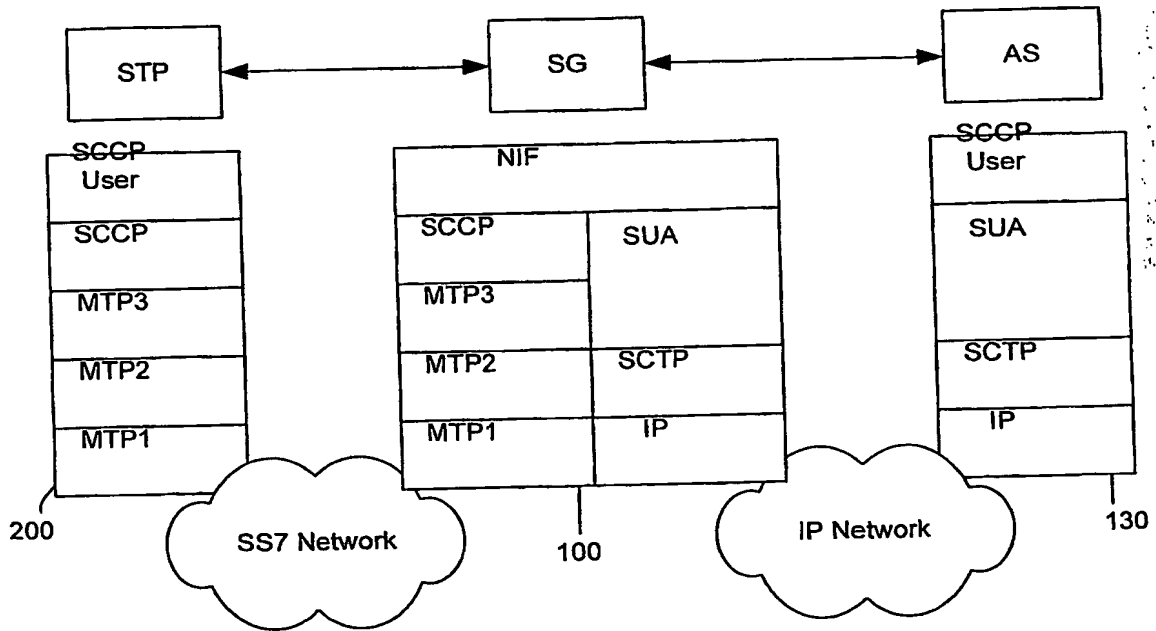
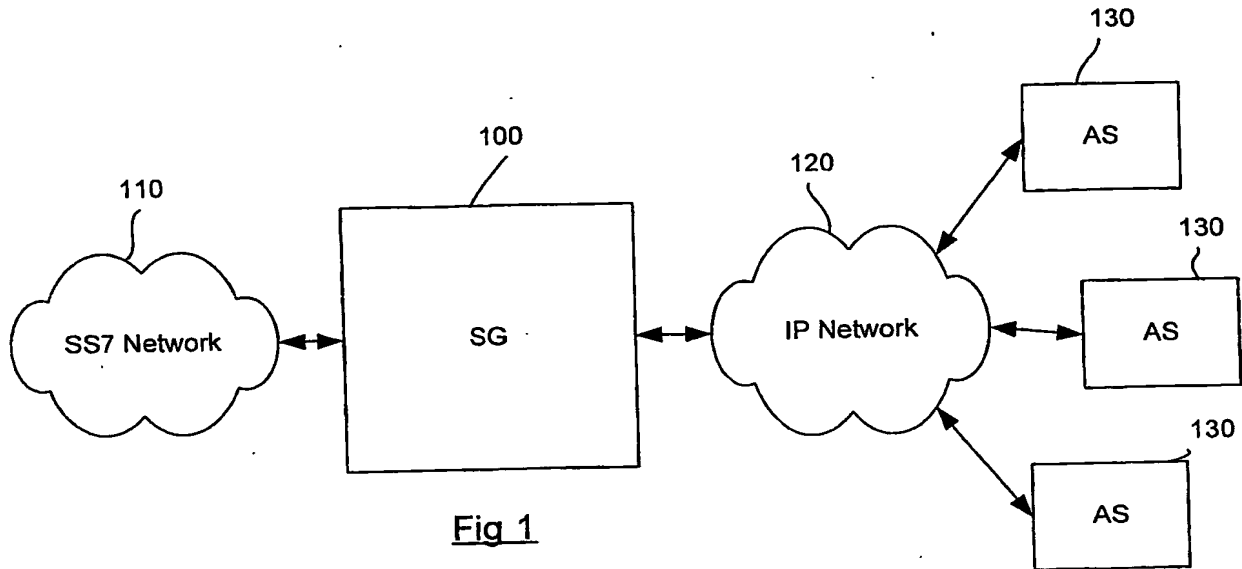


Fig 2a

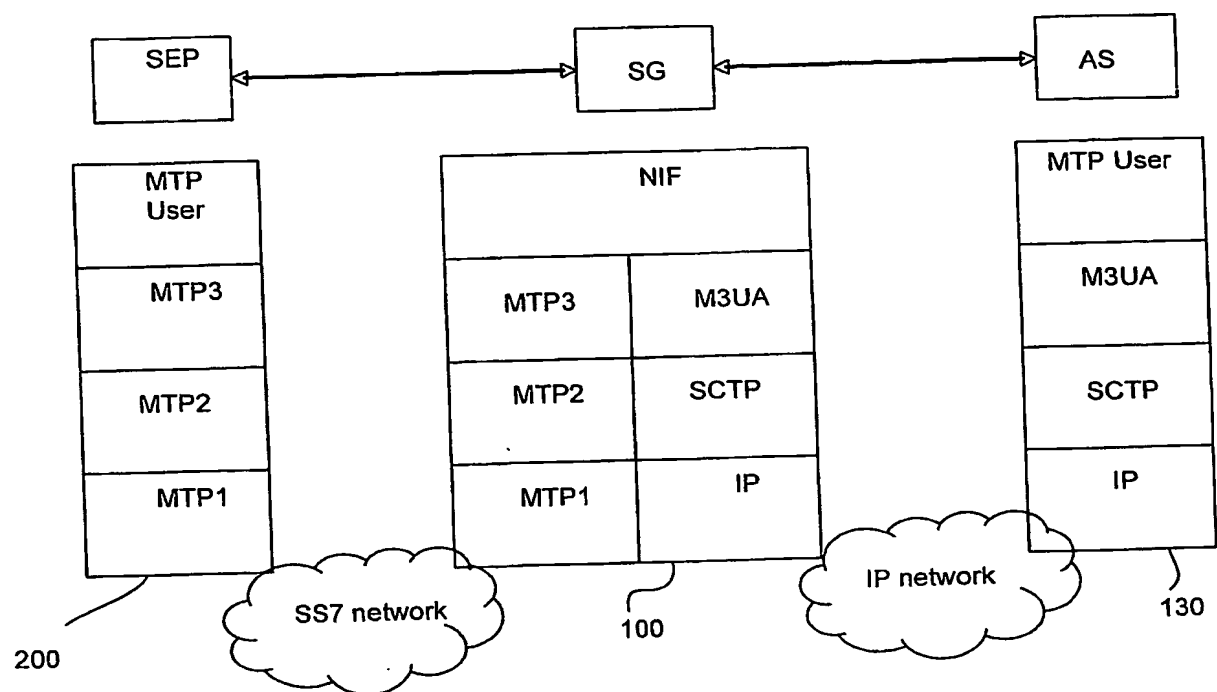
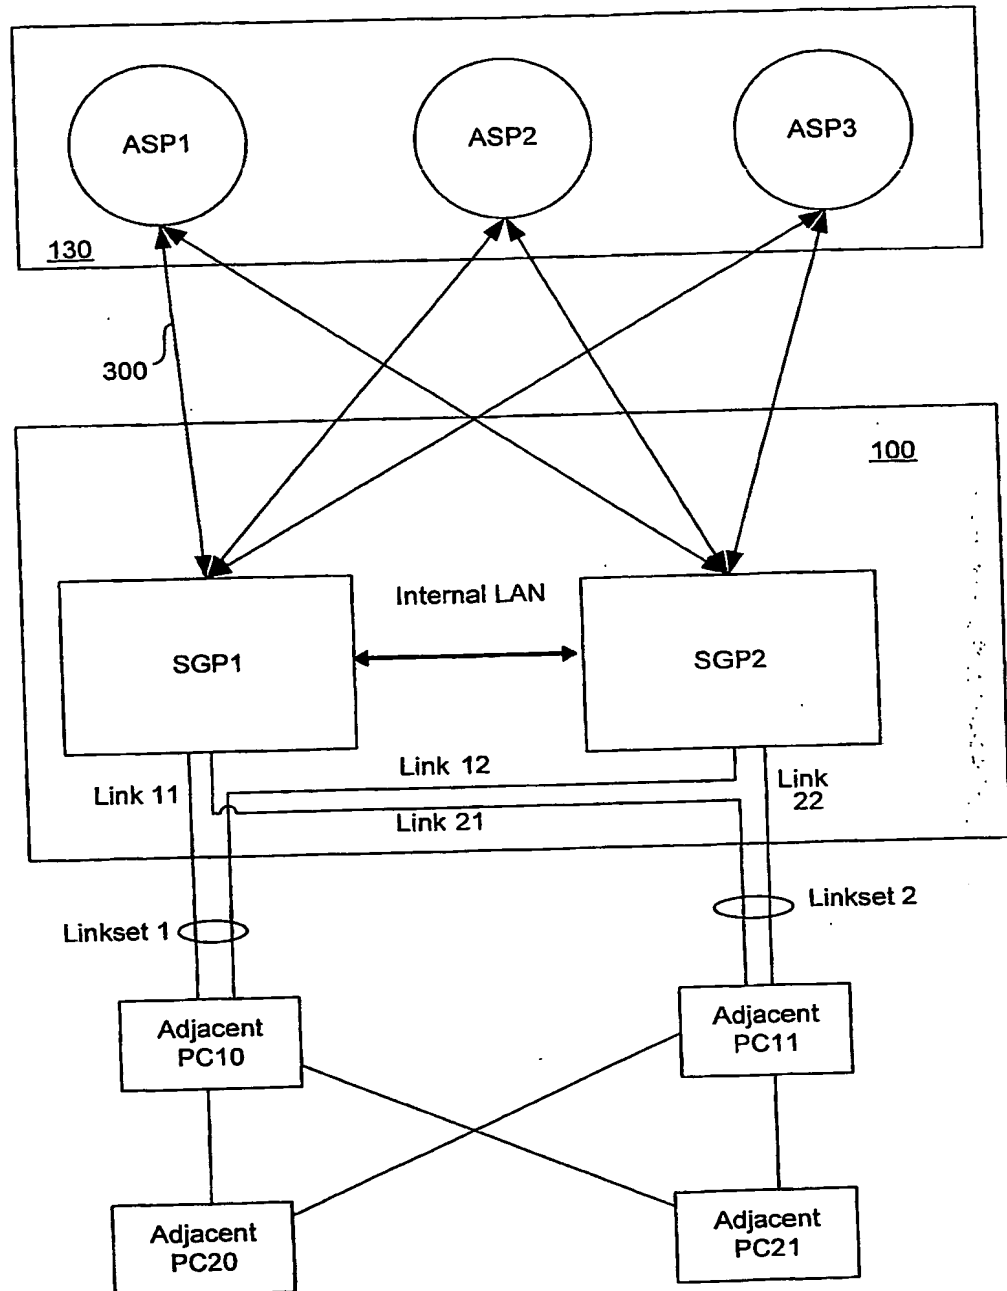


Fig 2b

Fig 3





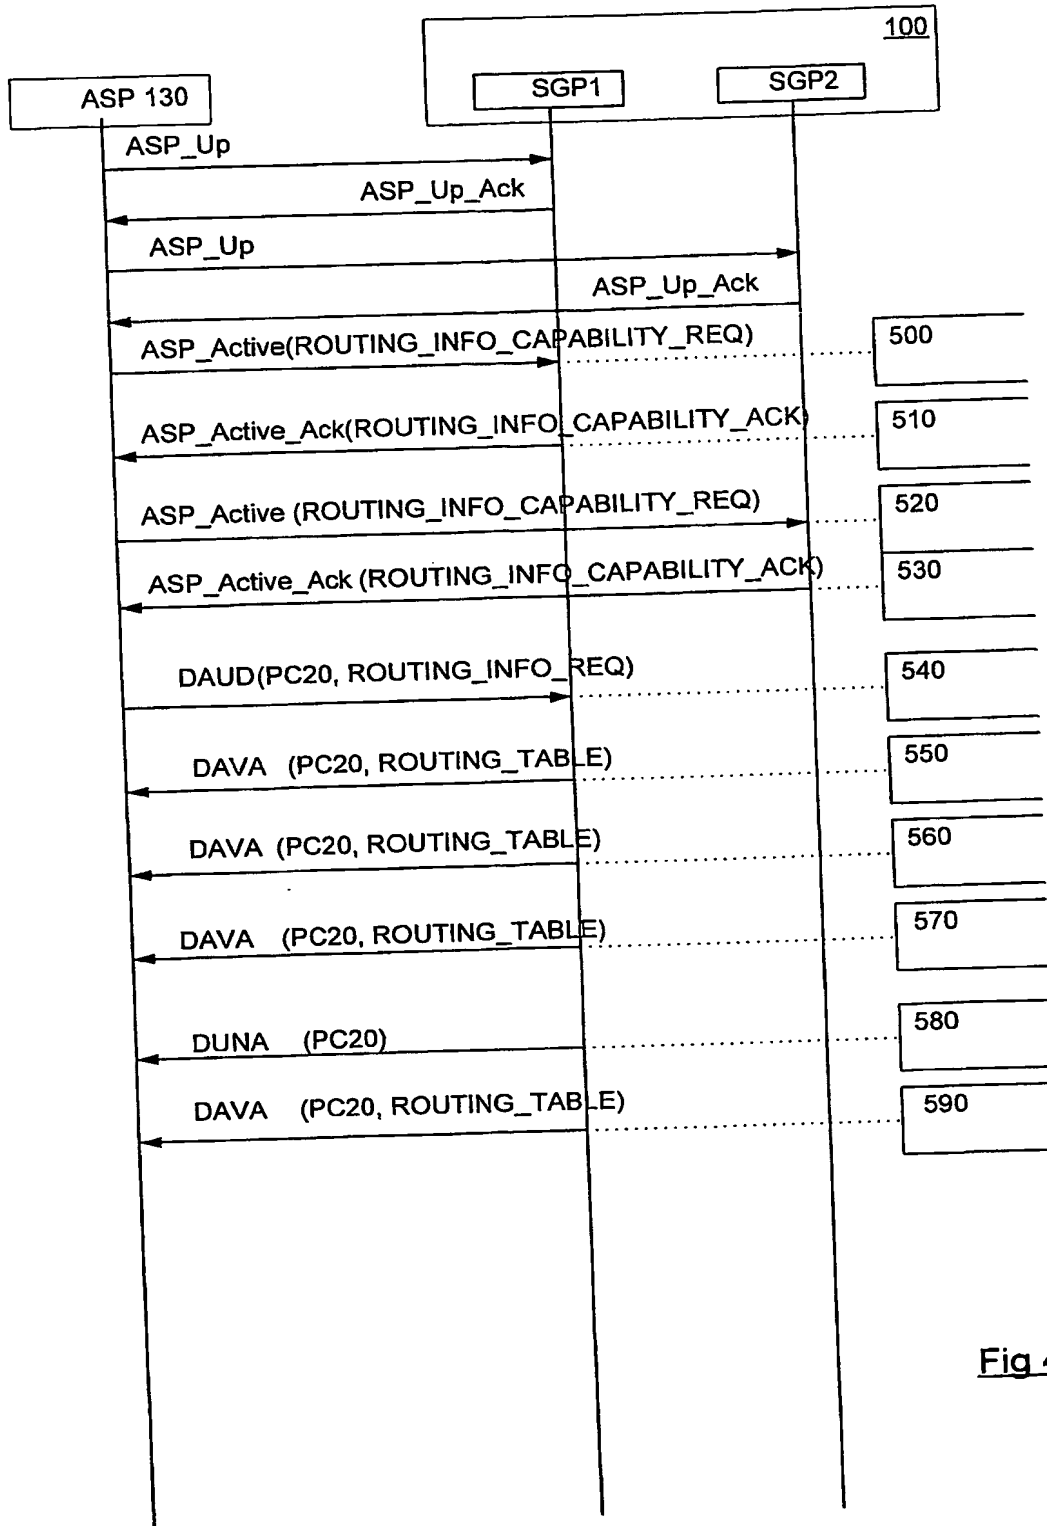


Fig 4

Fig 5Fig 6

*NRI*  
**PCT/EP2004/051592**

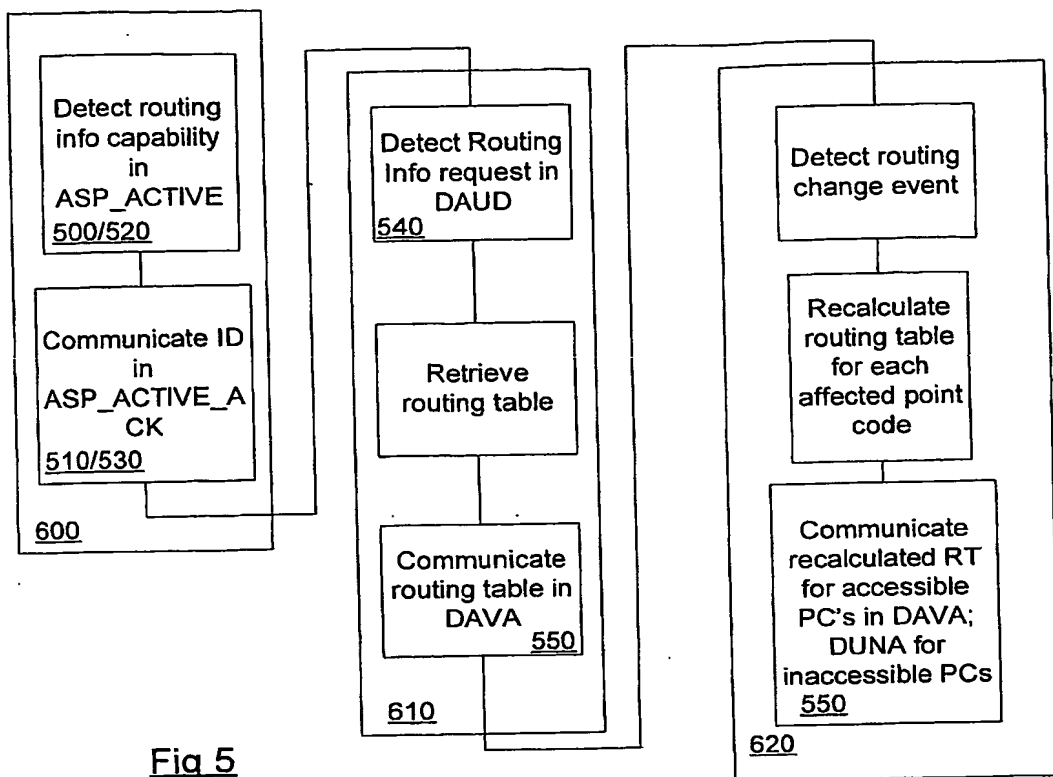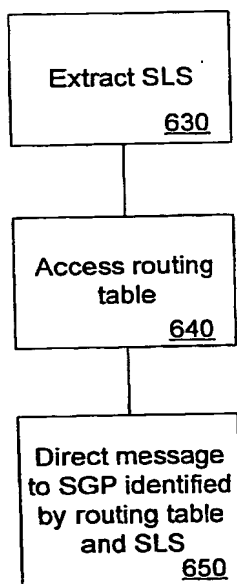

**Box No. VIII (ii) DECLARATION: ENTITLEMENT TO APPLY FOR AND BE GRANTED A PATENT**

*The declaration must conform to the standardized wording provided for in Section 212; see Notes to Boxes Nos. VIII, VIII (i) to (v) (in general) and the specific Notes to Box No. VIII (ii). If this Box is not used, this sheet should not be included in the request.*

Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent (Rules 4.17(ii) and 51bis.1(a)(ii)), in a case where the declaration under Rule 4.17(iv) is not appropriate:

In relation to this international application Hewlett-Packard Development Company, L.P. is entitled to apply for and be granted a patent by virtue of the following:

Hewlett-Packard Development Company, L.P. is entitled by an agreement between it and the employer of the inventors GARNERO Pierre, DESIDERIO Didier and DRIGUES-HANOUN Didier, HP Centre de Competences France, 53 Av. Raymond Chanas, 38053 Grenoble Cedex 09 France, dated February 1st, 2003.

This declaration is made for the purposes of all designations [except for the designation of the United States of America].

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (ii)".

**Box No. VIII (iii) DECLARATION: ENTITLEMENT TO CLAIM PRIORITY**

*The declaration must conform to the standardized wording provided for in Section 213; see Notes to Boxes Nos. VIII, VIII (i) to (v) (in general) and the specific Notes to Box No. VIII (iii). If this Box is not used, this sheet should not be included in the request.*

Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application specified below, where the applicant is not the applicant who filed the earlier application or where the applicant's name has changed since the filing of the earlier application (Rules 4.17(iii) and 51bis.1(a)(iii)):

in relation to this international application, Hewlett-Packard Development Company, L.P. is entitled to claim priority of earlier application No. EP03292367.4 by virtue of the following:

Hewlett-Packard Development Company, L.P. is entitled by an agreement between it and the employer of the inventors GARNERO Pierre, DESIDERIO Didier and DRIGUES-HANOUN Didier, HP Centre de Competences France, 53 Av. Raymond Chanas, 38053 Grenoble Cedex 09 France, dated February 1st, 2003.

This declaration is made for the purposes of all designations.

☐ This declaration is continued on the following sheet, "Continuation of Box No. VIII (iii)".

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**